


LEGEND

- | | | |
|---|---|---|
| ① HUNTER WIRELESS VALVE LINK (WVL) PER PLAN | ⑤ FINISHED GRADE | ⑫ GRAVEL BASE: DEPTH AS SPECIFIED |
| ② HUNTER MULTI-PURPOSE BOX WITH LID (MB-0811) PER PLAN: DRILL 1.5" [38MM] HOLE IN LID | ⑥ PVC CONDUIT WITH SWEEP | ⑬ IRRIGATION LATERAL |
| ③ 18"-24" [50 CM] COILED WIRE WITH WATERPROOF CONNECTORS | ⑦ HUNTER REMOTE CONTROL VALVE (ICV) WITH DC LATCHING SOLENOID | ⑭ MAINLINE AND FITTINGS |
| ④ IRRIGATION VALVE BOX PER PLAN: HEAT STAMP LID WITH 'RCV' IN 2" LETTERS | ⑧ SCH. 80 CLOSE NIPPLE: MATCH SIZE TO VALVE | ⑮ HUNTER WVL SOLAR PANEL (SP-WVL) |
| | ⑨ PVC SLIP X FPT ADAPTOR | ⑯ 5/16" STAINLESS STEEL BAND CLAMPS BY OTHERS (2) |
| | ⑩ BRICK SUPPORTS | ⑰ POLE PER PLAN |
| | ⑪ FILTER FABRIC: WRAP TWICE AROUND BRICK SUPPORTS | ⑱ CONCRETE FOOTER AS REQUIRED |

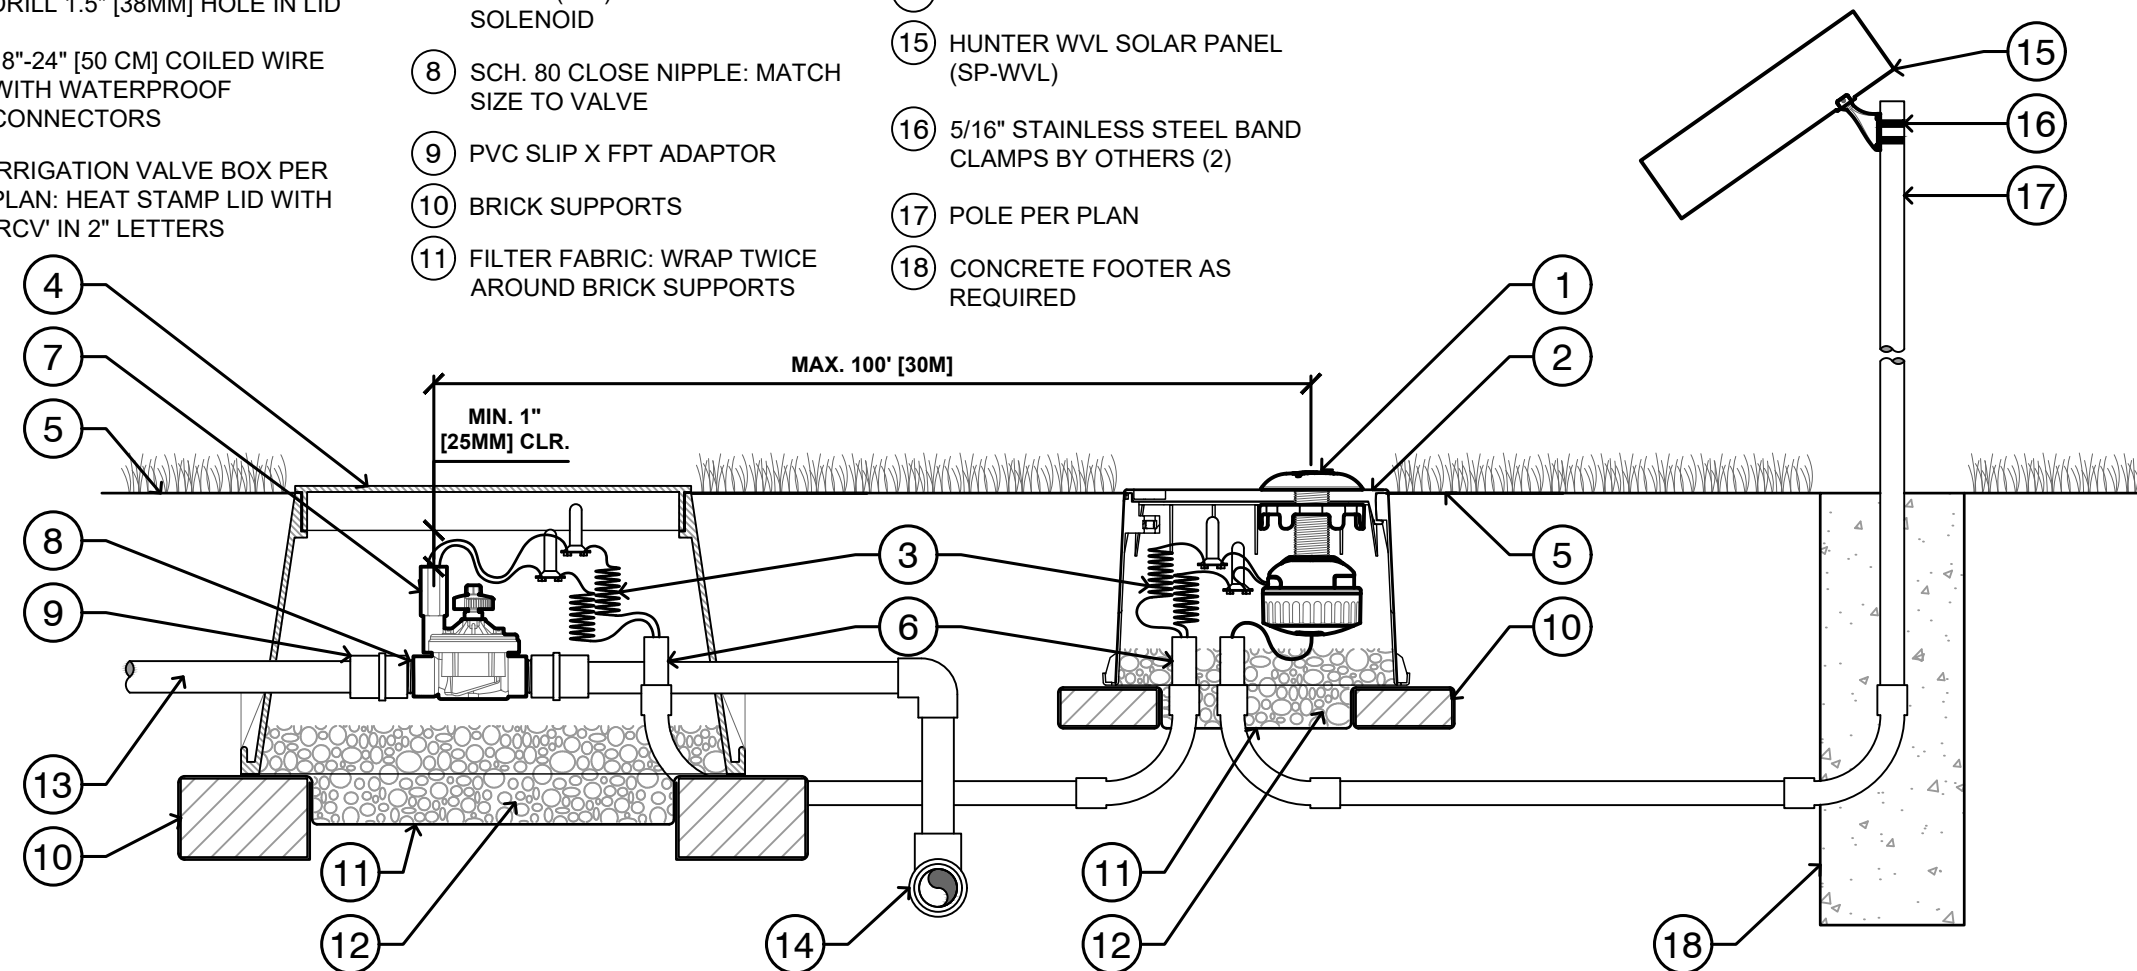

NOTES

1. LOCATE SOLAR PANEL AWAY FROM TREES AND OBSTACLES, ALIGN FOR MAXIMUM SUN EXPOSURE.
2. MAXIMUM LENGTH 40' [12M] FROM SOLAR PANEL TO WIRELESS VALVE LINK.
3. MAXIMUM DISTANCE 100' [30M] BETWEEN WIRELESS VALVE LINK AND DC LATCHING SOLENOID.
4. REFER TO THE HUNTER INSTALLATION GUIDE FOR FURTHER INSTRUCTIONS.

00

WIRELESS VALVE LINK IN MULTI-PURPOSE BOX WITH ICV VALVE AND SOLAR PANEL

N.T.S.