

Centralus Software

Enable ICC2 and ACC2 controllers with next-generation management technology.

Mobile-Friendly

The mobile-friendly Centralus irrigation management platform provides highly secure, comprehensive cloud-based control and monitoring features. The connectivity allows you to view a controller's status, change settings, view forecasts, save water, and receive instant notification of important system alarms.

User-Friendly

The addition of internet access brings dial-based ICC2 and ACC2 controllers seamlessly into the world of next-generation irrigation control. From the intuitive Centralus dashboard, it is now easier than ever before to add alarm monitoring, location information, remote operation, and scheduling to ICC2 and ACC2 controllers.

Easy to Upgrade

To upgrade to Centralus control, add a simple Wi-Fi or LAN communication module to the controller:

- ICC2: Add WIFIKIT or LANKIT
- ACC2: Add A2C-WIFI or A2C-LAN

CENTRALUS CONTROLLER COMPARISON CHART

CONTROLLER MODELS	MAXIMUM STATIONS	SENSOR INPUTS	TWO-WIRE	REMOTE CONTROL	WEB ACCESS
ICC2	54	1	EZDS, 54 stations	ROAM, ROAM XL, Smartphone with Wi-Fi	Centralus*: Wi-Fi, LAN
ACC2	54, 225 two-wire	3 Klik, 6 Flow	ICD, 225 stations	ROAM, ROAM XL, Smartphone with Wi-Fi	Centralus*: Wi-Fi, LAN

*Cellular connections available in 2020.

CENTRALUS™ SOFTWARE

Add cloud-based control and monitoring for ICC2 and ACC2 controllers with the mobile-friendly Centralus irrigation management platform.

KEY BENEFITS

- Browser-based programming and communication software
- Highly secure cloud access
- Map-based navigation and status
- Instant remote control from mobile device
- Flow monitoring and reporting
- Alarm reporting and detailed irrigation history reports
- Responsive web design configures for your device, allowing the same controls from your smartphone, tablet, or desktop
- Ethernet or Wi-Fi connectivity options
- Built-in Solar Sync™ logic/Solar Sync Delay features for smart water savings
- Professional crewmember administration with multiple levels of access
- Organise maintenance teams and their controllers into management groups

OPERATING SPECIFICATIONS

- Operates in most modern browsers (Internet Explorer® is no longer supported and may not display all screens correctly)
- Secure internet connection for web-hosted application

USER-INSTALLED OPTIONS

- Solar Sync smart weather sensors, one per controller
- Flow sensors including Flow-Sync, WFS, and other approved equals
- Connected controllers are compatible with ROAM/ROAM XL licence-free remote control (pre-wired controller connection)

COMMUNICATION OPTIONS

- Ethernet with RJ-45 connection, low data requirements
- Wi-Fi 802.11 b/g/n, 2.4 GHz

COMMUNICATIONS

Model	Description
WIFIKIT	ICC2 Wi-Fi connection
LANKIT	ICC2 LAN (Ethernet) connection
A2C-WIFI	ACC2 Wi-Fi connection
A2C-LAN	ACC2 LAN (Ethernet) connection



WIFIKIT
Height: 10.8 cm
Width: 6.4 cm (installed)
Depth: 3.5 cm

COMMUNICATIONS ACCESSORIES

Model	Description
WIFIEXTKIT	Antenna extension, conduit mount (up to 3 m cable), use with A2C-WIFI only




LANKIT
Height: 10.8 cm
Width: 6.4 cm (installed)
Depth: 3.5 cm

Internet Explorer is a trademark of Microsoft Corporation.

ACC2 COMMUNICATION MODULE INSTALLATION



A2C-WIFI is installed behind the ACC2 facepack

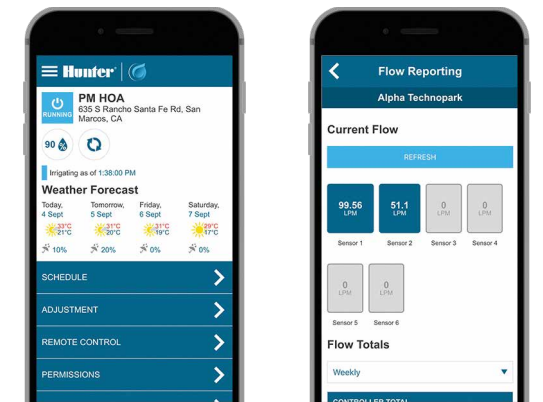

Manage and monitor controllers from anywhere

ICC2 WIFIKIT INSTALLATION

