

PRS30

PRESSURE REGULATED

Models: **Shrub, 10 cm, 15 cm, 30 cm**
 Pressure Regulation: **2.1 bar; 210 kPa**

FEATURES

- Models: Shrub, 10 cm, 15 cm, 30 cm
- Side inlet (SI) version available in 15 cm and 30 cm
- Identification cap is brown for easy field ID
- Innovative directional flush plug design
- Warranty period: 5 years
- ▶ Co-molded wiper seal
- ▶ Heavy-duty spring
- ▶ Industry's strongest spray body
- ▶ Innovative seal design
- ▶ Pro-Spray® check valve
- ▶ Pressure regulated to 2.1 bar
- ▶ FloGuard™ technology

OPERATING SPECIFICATIONS

- Operational pressure range: 1.0 to 7.0 bar; 100 to 700 kPa

FACTORY INSTALLED OPTIONS

- Drain check valve (up to 4.3 m of elevation)
- Check valve available on 10 cm, 15 cm, 30 cm
- Reclaimed water ID cap
- FloGuard technology available for check valve models

USER INSTALLED OPTIONS


- Vandal-proof cap (P/N PROS-PRS30-VPC)
- Drain check valve (up to 4.3 m of elevation; P/N 437400SP)
- Reclaimed water ID cap (P/N 458560)
- Snap-on reclaimed cover (P/N PROS-RC-CAP)

▶ = *Advanced Feature descriptions on page 64*



PROS-00-PRS30
 Retracted height: 11 cm
 Inlet size: ½"

PROS-04-PRS30
 Retracted height: 15.5 cm
 Pop-up height: 10 cm
 Exposed diameter: 5.7 cm
 Inlet size: ½"

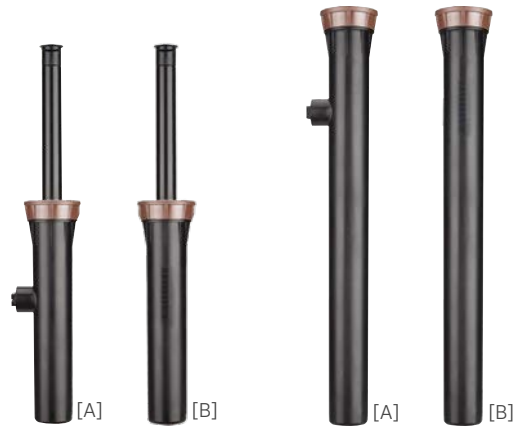

[A] **PROS-06-SI-PRS30**
 [B] **PROS-06-PRS30**
 Retracted height: 22.5 cm
 Pop-up height: 15 cm
 Exposed diameter: 5.7 cm
 Inlet size: ½"

[A] **PROS-12-SI-PRS30**
 [B] **PROS-12-PRS30**
 Retracted height: 41 cm
 Pop-up height: 30 cm
 Exposed diameter: 5.7 cm
 Inlet size: ½"

PRS30 – SPECIFICATION BUILDER: ORDER 1 + 2 + 3

1 Model	2 Feature Options	3 Specialty Options
PROS-00-PRS30 = 2.1 bar regulated shrub adapter	(blank) = No option	(blank) = No option
PROS-04-PRS30 = 2.1 bar regulated 10 cm Pop-up	CV = Factory-installed drain check valve (pop-up models only 15 cm and 30 cm models ordered as CV will come as no side inlet)	R = Factory-installed reclaimed body cap
PROS-06-PRS30 = 2.1 bar regulated 15 cm Pop-up		F = FloGuard technology
PROS-12-PRS30 = 2.1 bar regulated 30 cm Pop-up		F-R = FloGuard technology with reclaimed body cap

PRS30 (SIDE INLET) MODELS

Model

PROS-06-SI-PRS30 = 2.1 bar regulated 15 cm Pop-up with side inlet

PROS-12-SI-PRS30 = 2.1 bar regulated 30 cm Pop-up with side inlet

Examples:

PROS-06-SI-PRS30 = 15 cm Pop-up with side inlet regulated at 2.1 bar; 210 kPa
PROS-06-PRS30-CV = 15 cm Pop-up regulated at 2.1 bar; 210 kPa, drain check valve
PROS-12-PRS30-CV-F-R = 30 cm Pop-up regulated at 2.1 bar; 210 kPa, drain check valve, and FloGuard technology with reclaimed body cap



PRS30 Reclaimed

PRS30 models include optional factory-installed purple reclaimed caps



Related Solutions: Works Best With

Pro-Spray® Fixed Arc Nozzles and Pro Adjustable Nozzles work best with PRS30