
SWING JOINTS

With swivel ells on both ends, SJ Swing Joints easily adjust sprinklers to proper height and position in any configuration.

KEY BENEFITS

- Strength, longevity and contamination resistance
 - Prefabricated PVC design with O-ring seals
- Configurations to meet every installation requirement
 - Available in all popular inlet and outlet configurations
 - Choose from 20 cm, 30 cm, or 46 cm lay arm lengths
 - Single top-out or triple top-out designs

Swing Joints HSJ-0 = Model ¾" HSJ-1 = Model 1" (25 mm) HSJ-2 = Model 11¼" (30 mm) HSJ-3 = Model 11½" (40 mm)

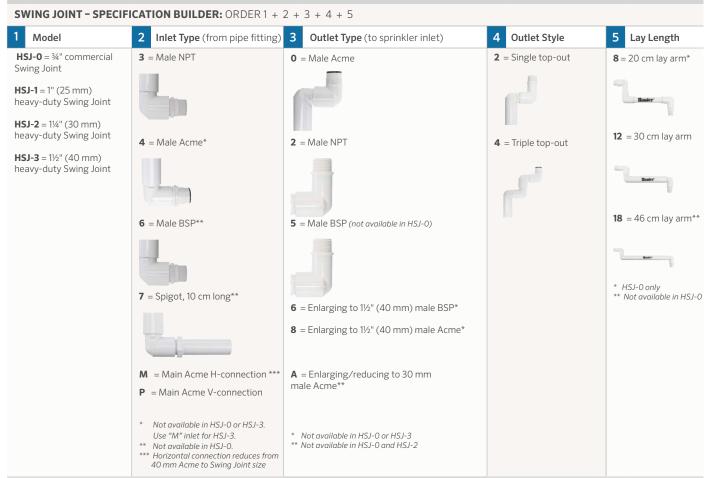

Example:

HSJ-1-3-2-2-12 = HSJ 1" (25 mm) heavy-duty Swing Joint, 1" (25 mm) NPT inlet, 1" (25 mm) male NPT single top-out outlet, 30 cm lay arm length

SnapLok is a trademark of LASCO Fittings Inc.

