

# ECO-MAT®

UNMATCHED UNIFORMITY AND WATER SAVINGS

Subsurface Irrigation: **Under Turf, Gardens, Small Shrubs**

## FEATURES

- Water-saving with nearly 100% distribution uniformity
- Promotes healthier plant roots
- Eliminates overspray onto sidewalks, buildings, or vehicles
- Perfect for irrigating difficult areas
- Use with PLD-Loc or barbed PLD fittings
- The polypropylene wrap protects against root intrusion without using toxic chemicals or metal byproducts
- Water holding capacity of 0.5 gal/yd<sup>2</sup>
- Pressure compensating
- Check valves keep the line charged up to 5' and prevent low point drainage
- Recommended for use with all Hunter Drip Control Zone Kits
- For maximum water savings, use with Hunter Soil-Clik®
- Warranty period: 5 years (plus 2 additional years for environmental stress cracking)


## ECO-MAT TECHNICAL SPECIFICATIONS

ECO-MAT	17 mm
Flow and Spacing	0.6 GPH and 12"
Roll Length	100' or 295'
Width	32"
ft <sup>2</sup>	100' roll is 266 ft <sup>2</sup> , 295' roll is 785 ft <sup>2</sup>
Operating Pressure	15 to 50 PSI
Minimum Filtration	120 mesh; 125 microns
Lateral Row Spacing	14"

## OPERATING SPECIFICATIONS

- Minimum filtration 120 mesh; 125 microns
- Operating pressure range: 15 to 50 PSI
- Compatible with PLD-LOC and 17 mm insert barb fittings
- Recommended installation depth range 4" to 12"

For maximum run length distances for the Eco-Mat or Eco-Wrap, reference the Maximum Run Length Chart on page 124. Use 0.6 GPH for flow and 12" emitter spacing.

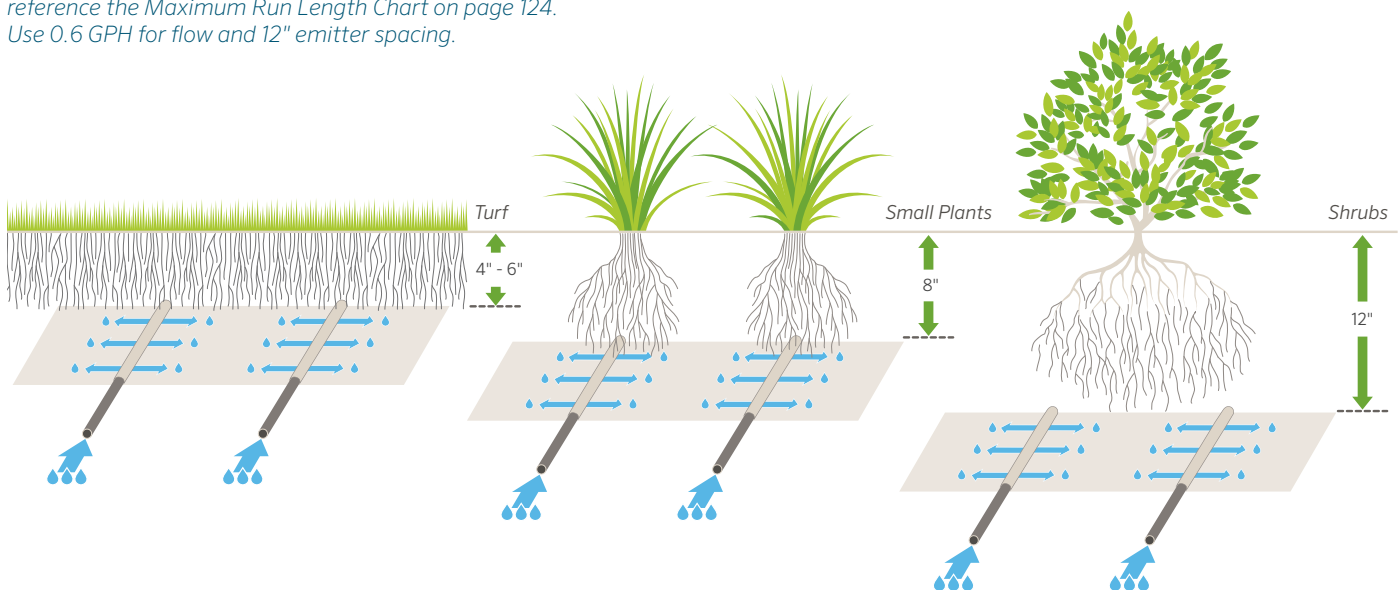

### Eco-Indicator

Pair with Eco-Mat and Eco-Wrap subsurface systems. Offers a visual signal that the system is operating. Requires 12 PSI minimum. Yellow, easy-to-see indicator stem with 6" pop up height.

MICRO