


ST-1600-KIT-B | Reference Guide

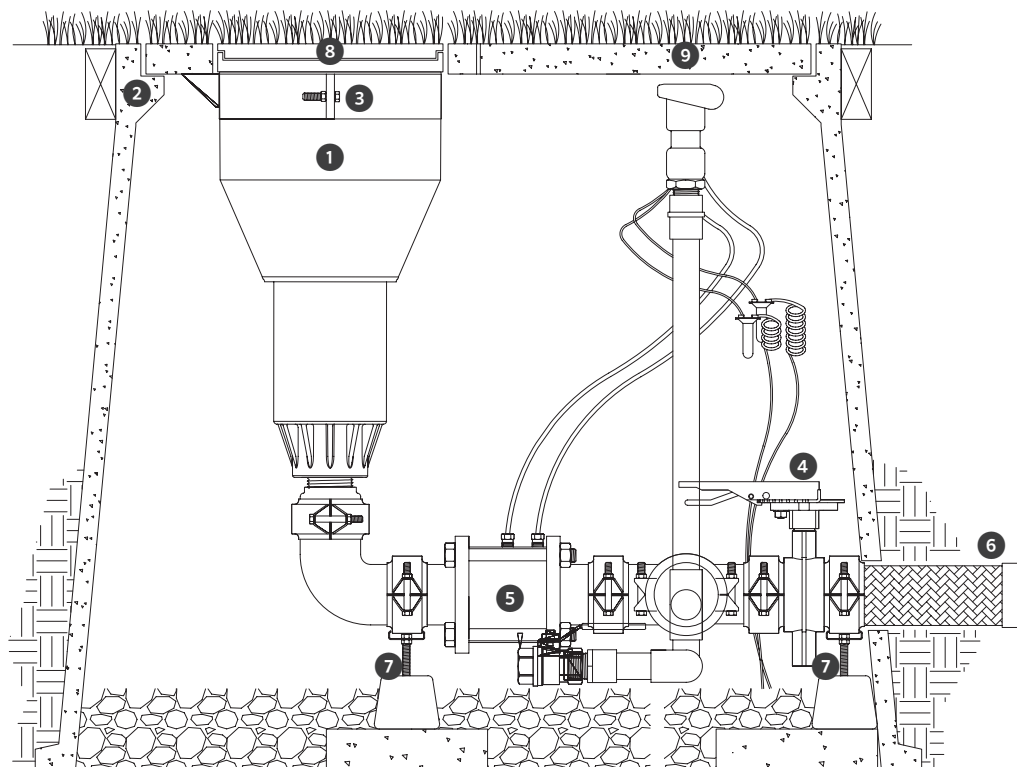

ST-1600-KIT-B Components

FIGURE	COMPONENTS TO ORDER	QTY	ITEM DESCRIPTION
1	ST-1600-HS-B	1	High-speed pop-up, adjustable arc (40°–360°), 2" (50 mm) BSP inlet
2	ST-243636-B	1	Composite vault, pre-cast hole for rotor and two quick-access ports for quick coupler and remote on-off-auto selector
3	ST-BKT-1600	1	Rotor vault hanger and grade adjustment bracket for ST-1600-HS-B rotor
4	ST-BVF30-K	1	Manifold butterfly valve and Victaulic® coupling fitting kit
5	ST-V30-KV	1	3" (80 mm) metal control valve, 80 mm grooved Victaulic inlet/outlet fitting, 91 cm remotely located solenoid and on-off-auto selector manifold
6	ST-H30-K	1	Ultra-flexible 8 cm x 66 cm long stainless steel corrugated manifold inlet hose with stainless steel braided outer support layer with 3" (80 mm) female NPT inlet
7	ST-SPT-K	2	Adjustable manifold support stand; two required per vault
8	ST-IBS-1600	1	Infill barrier system rubber cover kit for ST-1600-HS-B rotor
9	HQ-5RC-BSP	1	Quick coupler, 1" (25 mm) BSP inlet, 1¼" (32 mm) outlet for key

HUNTER INDUSTRIES | *Built on Innovation®*
 1940 Diamond Street, San Marcos, CA 92078 USA
 hunterindustries.com

Victaulic is a trademark of Victaulic Company.

© 2020 Hunter Industries Inc. Hunter, the Hunter logo, and all other trademarks are property of Hunter Industries, registered in the U.S. and other countries.