


ST-1600-KIT | Reference Guide

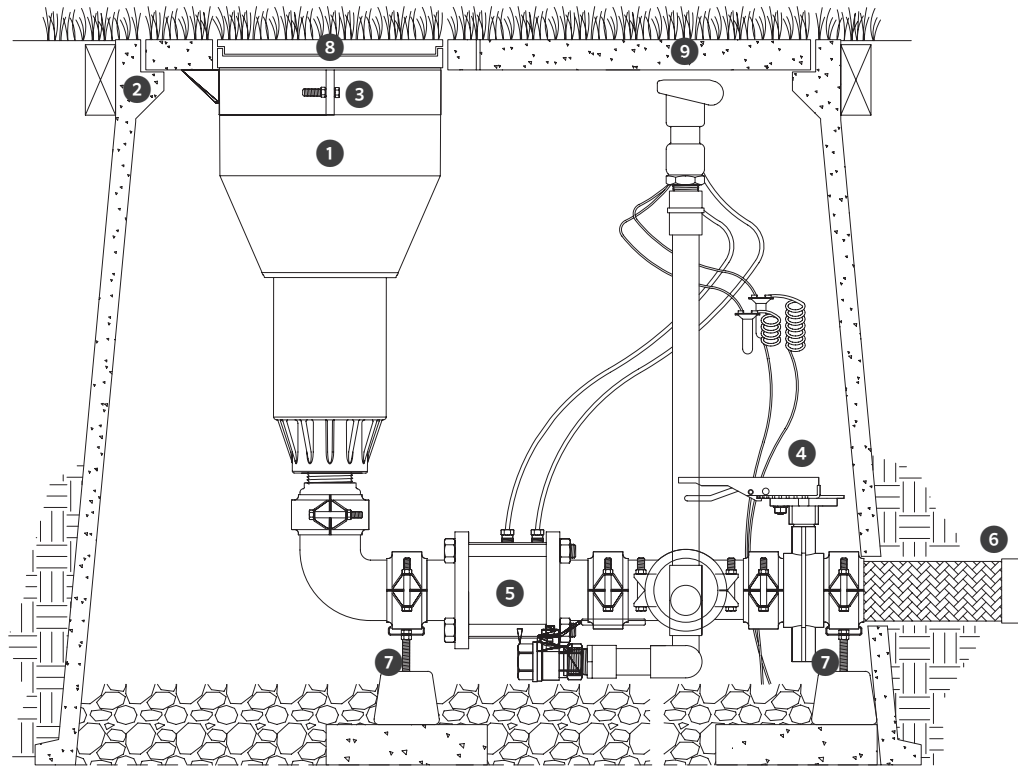

ST-1600-KIT Components

| FIGURE | COMPONENTS TO ORDER | QTY | ITEM DESCRIPTION |
|--------|---------------------|-----|--|
| 1 | ST-1600-HS-B | 1 | High-speed pop-up, adjustable arc (40°-360°), 2" BSP inlet |
| 2 | ST-243636-B | 1 | Composite vault, pre-cast hole for rotor and two quick-access ports for quick coupler and remote on-off-auto selector |
| 3 | ST-BKT-1600 | 1 | Rotor vault hanger and grade adjustment bracket for ST-1600-HS-B rotor |
| 4 | ST-BVF30-K | 1 | Manifold butterfly valve and Victaulic® coupling fitting kit |
| 5 | ST-V30-KV | 1 | 3" metal control valve, 3" grooved Victaulic inlet/outlet fittings, solenoid, and on-off-auto selector manifold |
| 6 | ST-H30-K | 1 | Ultra-flexible 3" x 26" stainless steel corrugated manifold inlet hose with stainless steel braided outer support layer with 3" female NPT inlet |
| 7 | ST-SPT-K | 2 | Adjustable manifold support stand; two required per vault |
| 8 | ST-IBS-1600 | 1 | Infill barrier system rubber cover kit for ST-1600-HS-B rotor |
| 9 | HQ-5RC | 1 | Quick coupler, 1" NPT inlet, 1¼" outlet for key |

HUNTER INDUSTRIES | *Built on Innovation®*
 1940 Diamond Street, San Marcos, CA 92078 USA
 hunterindustries.com

Victaulic is a trademark of Victaulic Company.

© 2020 Hunter Industries Inc. Hunter, the Hunter logo, and all other trademarks are property of Hunter Industries, registered in the U.S. and other countries.