




# LACROSSE FIELD 110x55 (METRIC)

I-50 ROTOR - FIVE ROW DESIGN  
LOOPEL MAIN LINE LAYOUT


HUNTER INDUSTRIES  
1940 DIAMOND STREET  
SAN MARCOS, CALIFORNIA 92078

SHEET  
1 of 2

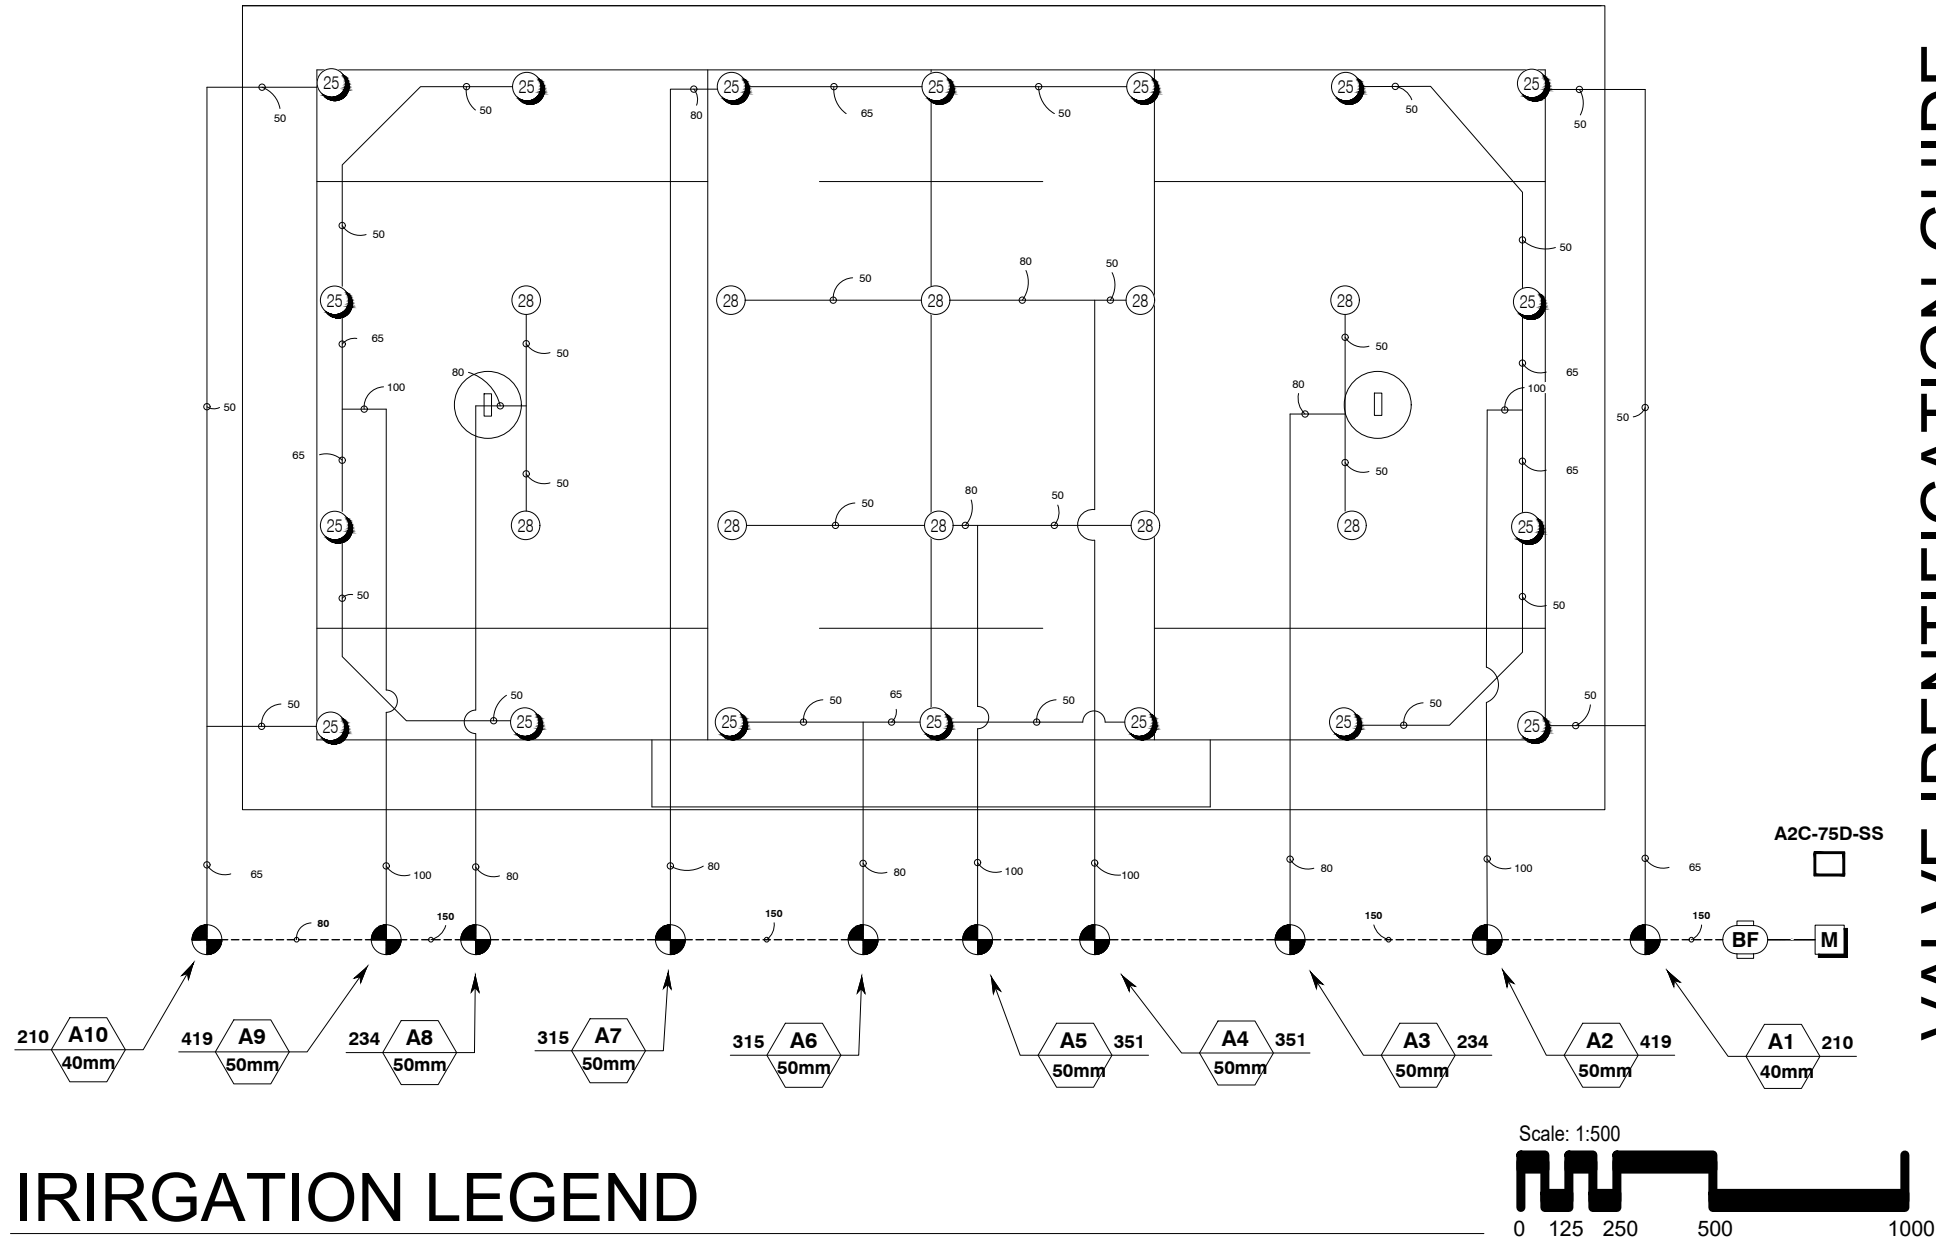

## VALVE IDENTIFICATION GUIDE

SYMBOL	MANUFACTURER/MODEL/DESCRIPTION
	Hunter ICV-G 40mm 1", 1-1/2", 2", and 3" Plastic Electric Remote Control Valves, Globe Configuration, with NPT Threaded Inlet/Outlet, for Commercial/Municipal Use.
	Hunter ICV-G 50mm 1", 1-1/2", 2", and 3" Plastic Electric Remote Control Valves, Globe Configuration, with NPT Threaded Inlet/Outlet, for Commercial/Municipal Use.
	Watts LF909M1 32mm Lead Free Reduced Pressure Backflow Preventer.
<b>A2C75D-SS</b>	Hunter A2C-75D-SS 75-Station Decoder controller in a stainless steel wall mount enclosure.
<b>M</b>	Water Meter 50mm
	Irrigation Lateral Line: PVC Class 200 SDR 21 50
	Irrigation Lateral Line: PVC Class 200 SDR 21 65
	Irrigation Lateral Line: PVC Class 200 SDR 21 80
	Irrigation Lateral Line: PVC Class 200 SDR 21 100
	Irrigation Mainline: PVC Class 315 SDR 13.5
	Irrigation Mainline: PVC Class 315 SDR 13.5 80
	Irrigation Mainline: PVC Class 315 SDR 13.5 150



## IRRIGATION LEGEND

SYMBOL	MANUFACTURER/MODEL/DESCRIPTION	QTY	kPa	l/min
	Hunter I-50-06-SS Turf Rotor, 6.0" Pop-Up. Adjustable to Full Circle. Drain Check Valve, Stainless Steel Riser, 1" Female NPT Inlet Threads, Standard Nozzle.	18	551.6	104.9
	Hunter I-50-06-SS-ON Turf Rotor, 6.0" Pop-Up. Adjustable to Full Circle. Drain Check Valve, Stainless Steel Riser, 1" Female NPT Inlet Threads, Dual Opposing Nozzle.	10	551.6	117.0

